

Good price,
Good Eminence

2021



Quartz Stone

1950x3500 mm 1600x3200 mm

Quartz Stone



1950x3500 mm 1600x3200 mm



Edge Profiles


Your surface is not complete without an edge profile to complement your slab selection and space.

The unique properties and durability of keros stone quartz surfaces allow for a wide range of edge profile design options.

Many edge profiles are possible, from a standard edge to laminated or mitered edges which create the appearance of a thicker slab.


All edge details should have a minimum 1/8" radius on any profile, for both top and bottom edges.

For high-traffic areas, 1/4" minimum radius is suggested.

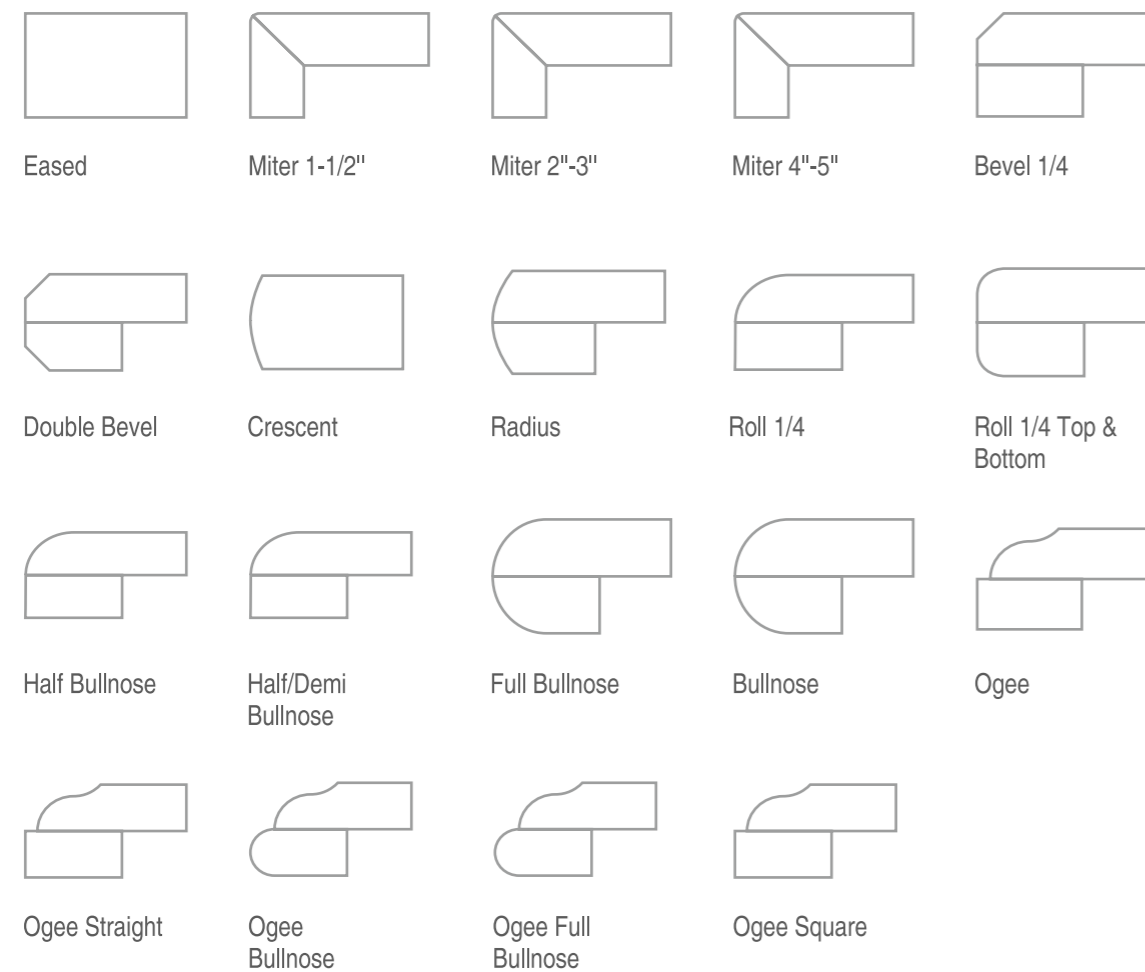


Quartz Stone


Available Thickness

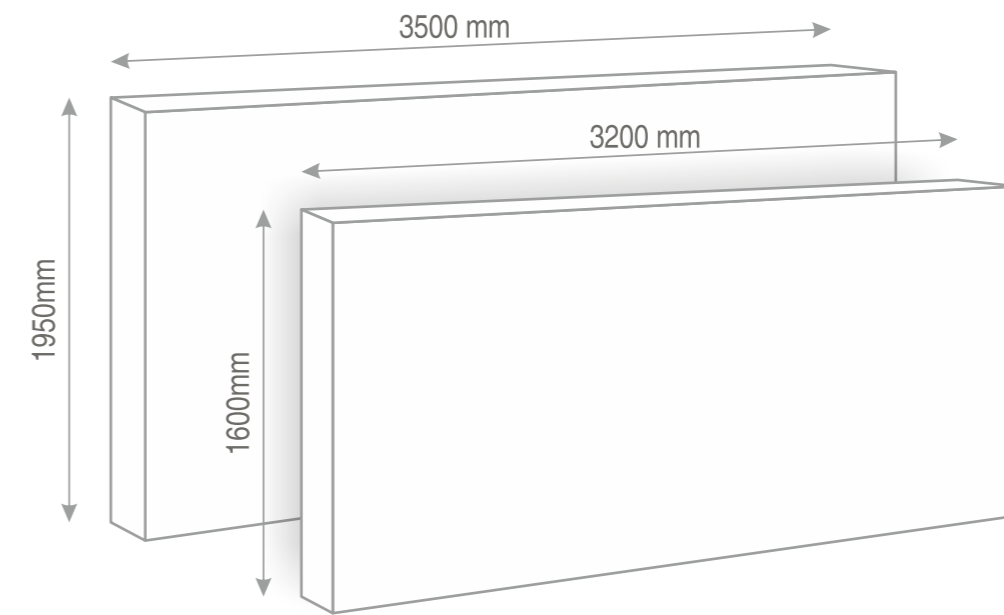

Available Thickness

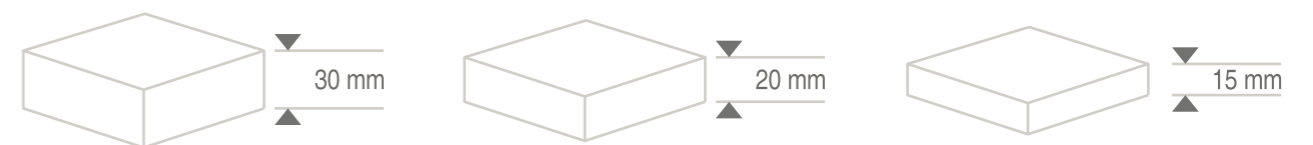

QUARTZ STONE
CALACATTO

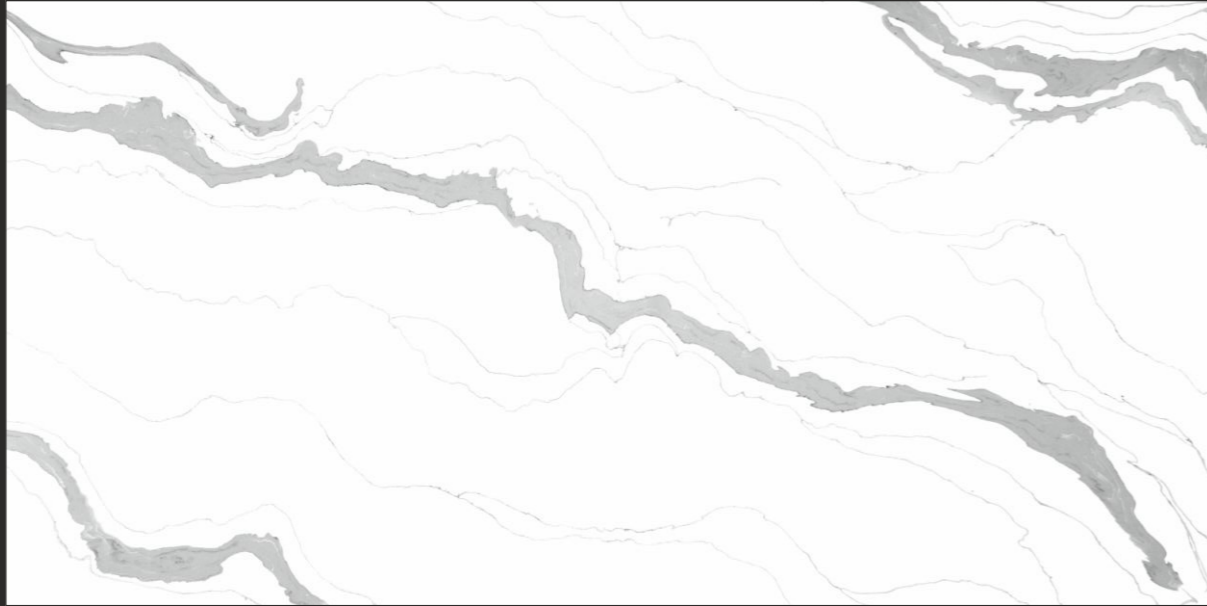

CONTINUO WHITE



CEIZER WHITE

SIZE AVAILABLE : 1600x3200 mm

THICKNESS AVAILABLE : 30 mm & 20 mm



CALACATTO



ARTESTIVE WHITE



ROYAL CALACATTO

SIZE AVAILABLE : 1600x3200 mm


THICKNESS AVAILABLE : 30 mm & 20 mm



CALACATTO



BISCO WHITE

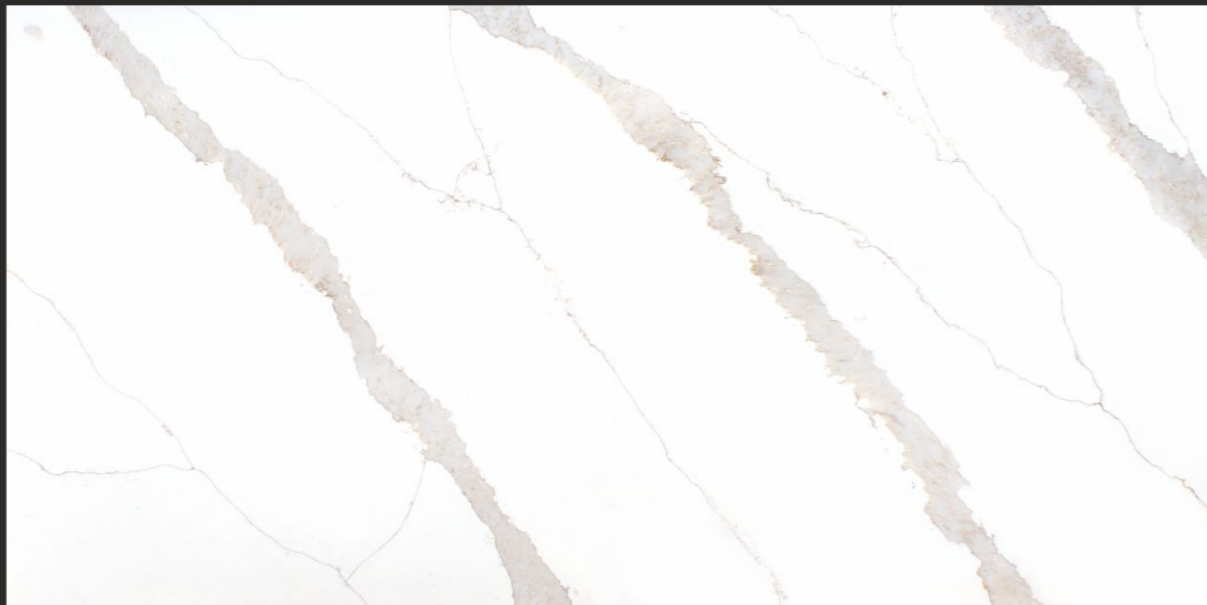

VENETIAN WHITE

SIZE AVAILABLE : 1600x3200 mm

THICKNESS AVAILABLE : 30 mm & 20 mm

CALACATTO



SPIDER WHITE




CONCIERGE



CALACATTO



CALACATTO ALAS A/B

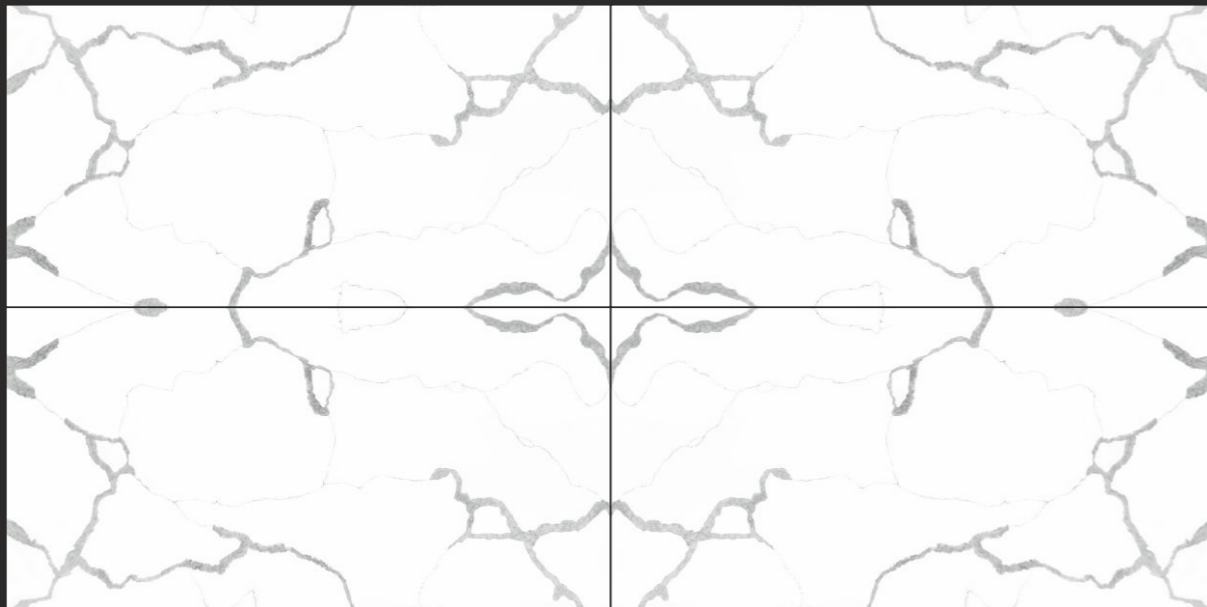

SIZE AVAILABLE : 1600x3200 mm

THICKNESS AVAILABLE : 30 mm & 20 mm



IMPERIAL




IMPERIAL



SIZE AVAILABLE : 1600x3200 mm

THICKNESS AVAILABLE : 30 mm & 20 mm

PREMIUM WHITE




PREMIUM WHITE




SIZE AVAILABLE : 1600x3200 mm

THICKNESS AVAILABLE : 30 mm & 20 mm


CARARRA SERIES

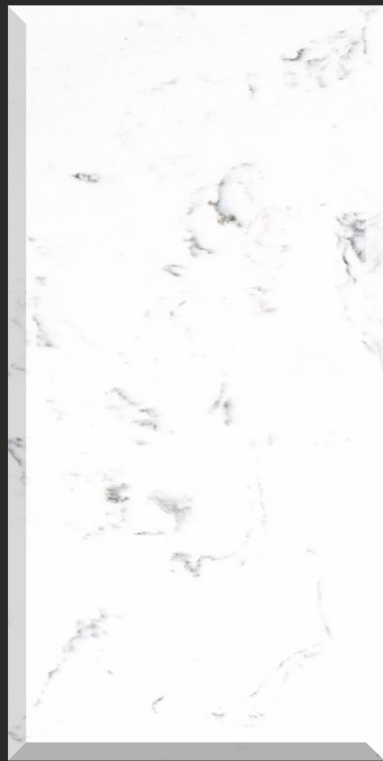

MATARAZZO WHITE

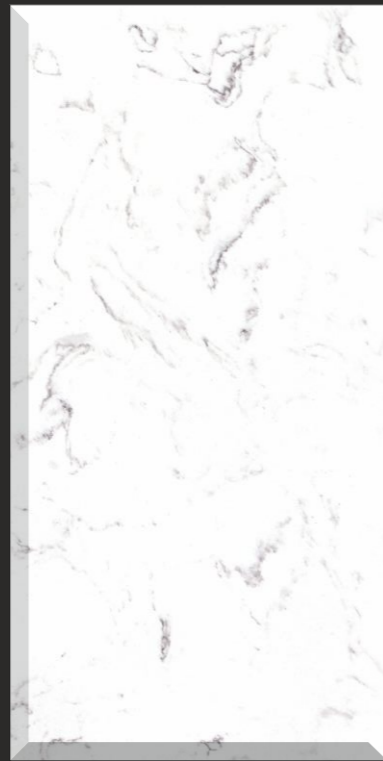

MATARAZZ WHITE

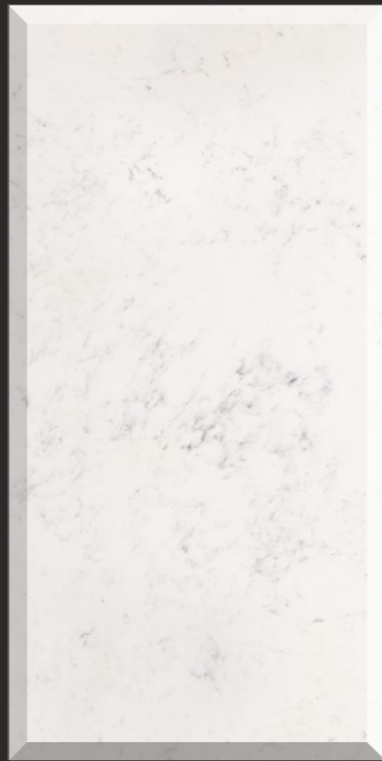


ASPEN WHITE

MOSAIC



FROST WHITE

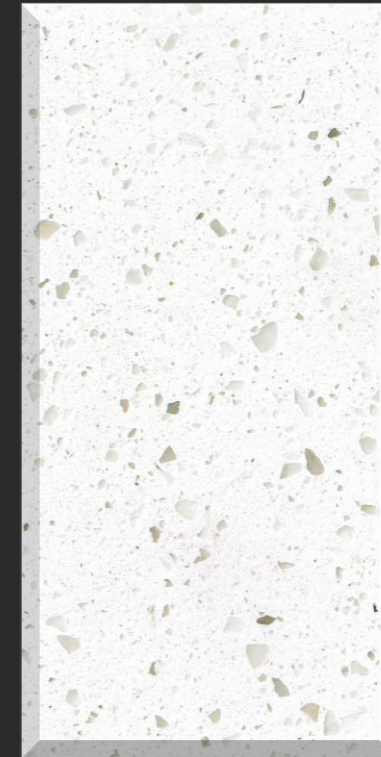

BIANCO ICE



MOSAIC



GREY MOSAIC




WHITE MOSAIC



BLACK MOSAIC



PEPPER

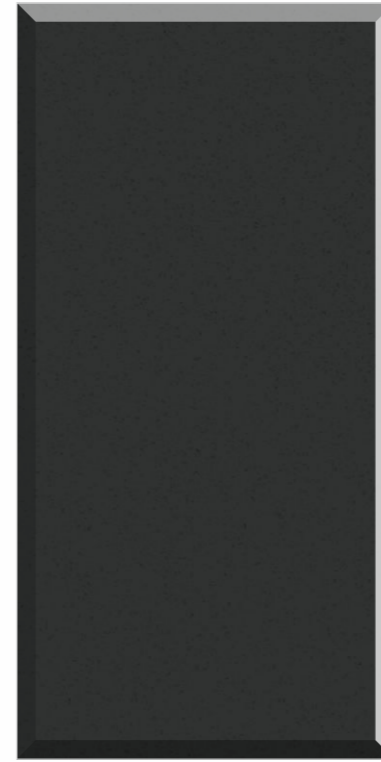

BLACK PEPPER



WHITE PEPPER



SILVER PEPPER



GREY PEPPER



DURST



DURST CEMENTO



DURST GREY



TERRAZO



TERRAZO GREY



TERRAZO WHITE



TERRAZO SILVER




COLORED QUARTZ



BUTTERSCOTCH



BLACK PEARL

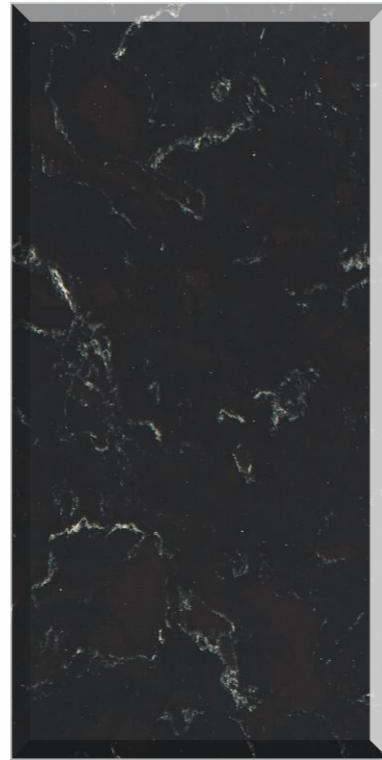

VANILLA NOIR



BEHEJA FLORITO




PIATRA GREY



COLORED QUARTZ



LIQUID FOREST

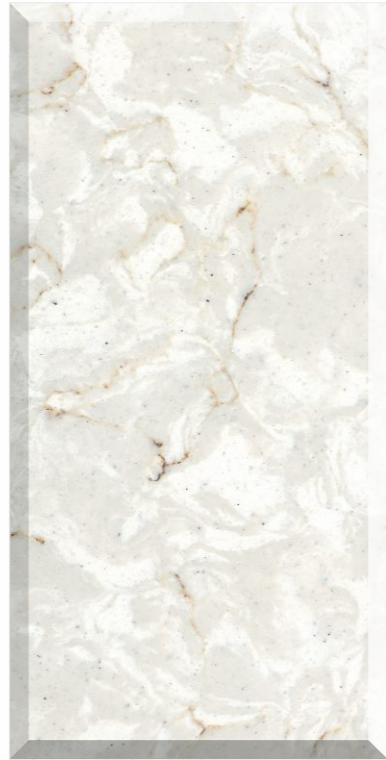

ARABESQUE



COMPAC



DOVE GREY



WILD ROCK



MONTCLAIR WHITE

TECHNICAL SPECIFICATION

Technical Specifications - Quartz Stone

Test Performed	Test Standard	Results
App. Density Kg/dm ³	EN14617-1	2.2 -2.45
Water Absorption	EN14617-1	<0.04
Flexural Strength(Mpa)	EN14617-2	50 - 60
Dimensional Stability	EN14617-12	Class A
Impact Resistance (Joule)	EN14617-9	4 - 9 Joule
Compressive Strength (Mpa)	EN14617-15	170 -220
Abrasion Resistance	EN14617-4	Groove Length=21.1mm
Frost Resistance	DIN 52104	Complies With Standard
Surface Hardness (Mohs Scale)	EN 101	6.0 -7.0
Stain Resistance	ANSI Z124.6	Pass
Wear & Cleanability	ANSI Z124.6	Pass
Chemical Resistance	ANSI Z124.6	Pass
Chemical Resistance	EN14617-10	Class C4
Resistance To Acids	ASTM C 650	Not Affected
Linear Thermal Expansion (30 ^o -60 ^o) °C ⁻¹	EN14617 -11	2.6x10 ⁻⁶
Boiling Watet Resistance	NEMA LD3-3.5	Pass
High Temperature Resistance	NEMA LD3-3.6	Pass
Cigarette Test	ANSI Z124.6	Pass
Fire Classification	EN13501-1	Wall Cladding: B-s1 -d0, Flooring & Stairs: B-fi-s1
Slip Resistance	EN 14231	We: 13-21 SRV , Dry: 43-53 SRV
Radiation	GB 6566-2010	Complies With Requirement Of Standard
Thermal Shock Resistance	EN14617-6	No Visual Defects After 10 Cycle. Loss in Flexural Strength= Loss In Mass = 0.02%-0.05% 0.7%-1.1%
Freeze & Thaw Resistance	EN14617-5	No Defects After 25 Freeze-Thaw Cycle.
Glossiness Reflection	%	45-70
Surface Slip Resistance HONED 400	DIN 51130	R9
Static Coefficient Of Friction	ASTM C 1028	Dry: 08, Wet: 0.6

Quartz Slab Size : 1950x3500mm | 1600x3200mm | 1450x3050mm

Note : Printed representation of colour may vary from the actual product. Please view the actual product prior to selection.